



Residential / Commercial



N-Type

Bifacial Module with Double Glass

Type: DMxxxM10RT-B60HBB

Power Range: 485 - 500 W

Max. Efficiency : 22.6%



Aesthetics

Designed with aesthetics in mind, the module blends harmoniously with the appearance of your house while producing high energy.



Better Performance

U~IA [a~ |•A^i-|{ A^c^iA} A~ } ^ Aa aAQ dAe•A
c@e\•A A A] d a^aA{]^iæ |^A^ &a} E



Excellent Low Light Performance

U~IA [a~ |•A^i-|{ A^c^iA} A~ } ^ Aa aAQ dAe•A
c@e\•A A A] d a^aA{]^iæ |^A^ &a} E




Excellent Quality

More than 40 years' experience of manufacturing and intensive quality tests above the IEC standard ensures reliable modules and a secured investment.




Assumption of Environmental, Social and Governance Responsibility (ESG)

DMEGC stands for his responsibility. Production is certified according to SA 8000 (ILO standards).

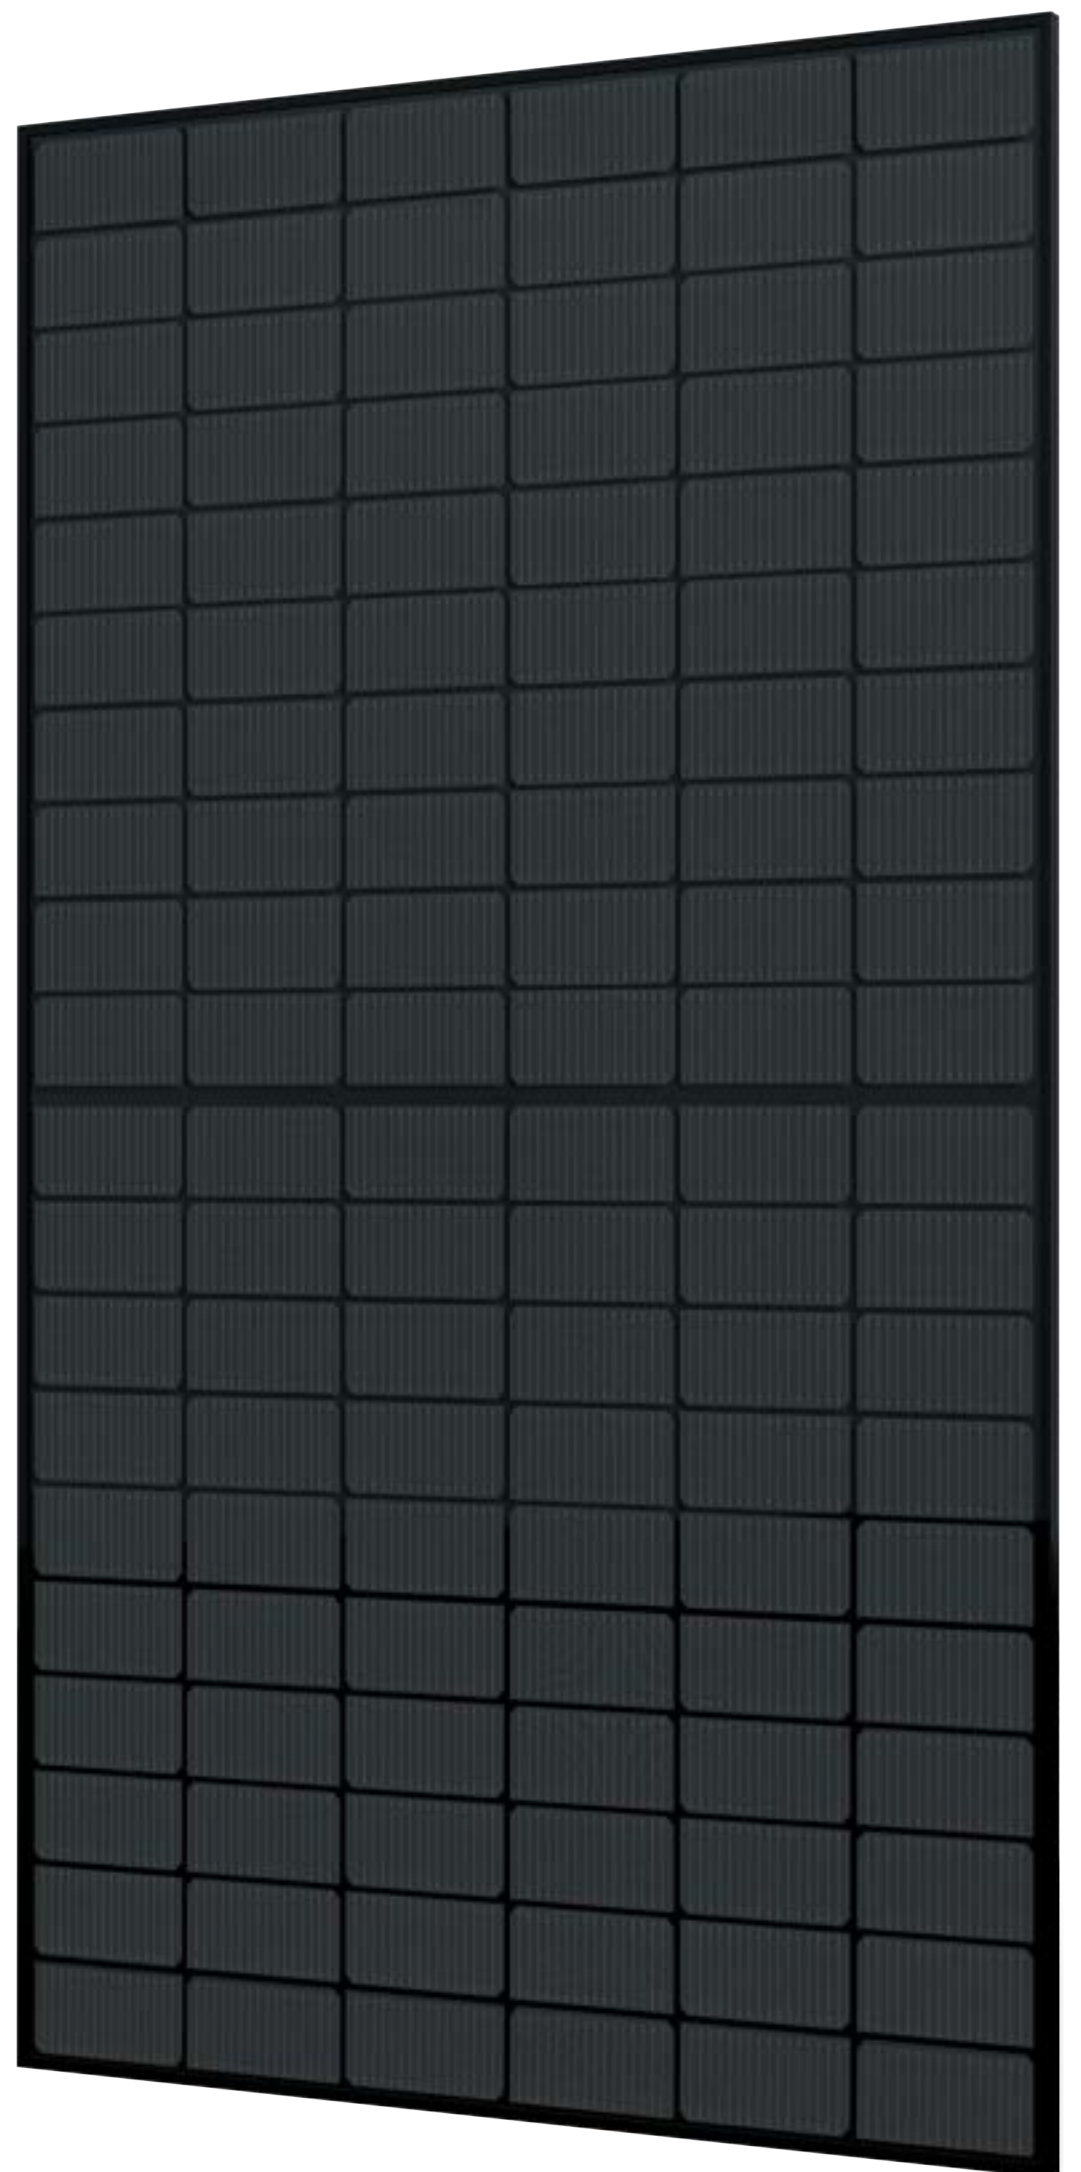

Certifications

- SA 8000 ILO Standards. Social responsibility standards
- ISO 9001 Quality management system
- ISO 14001 Environmental management system
- ISO 45001 Occupational health and safety management system
- ISO 50001 Energy management system




DMxxxM10RT-B60HBB



Module Specification

Cell Type	N -type Mono-crystalline , 120 (6x20)
Dimensions (mm)	1950 x 1134 x 30
Weight (kg)	27.1
Front Cover	2 mm heat strengthened glass with anti -reflective coating
Rear Cover	2 mm heat strengthened glass
Junction Box	3 Diodes, IP68 according to IEC 62790
Cables	4mm ² /Portrait: 350mm (+)/250mm(-) Landscape: 1300mm(+)/1300mm(-) Length can be customized
Connector Type	PV-ZH202B or MC4-EVO 2A (1500V)

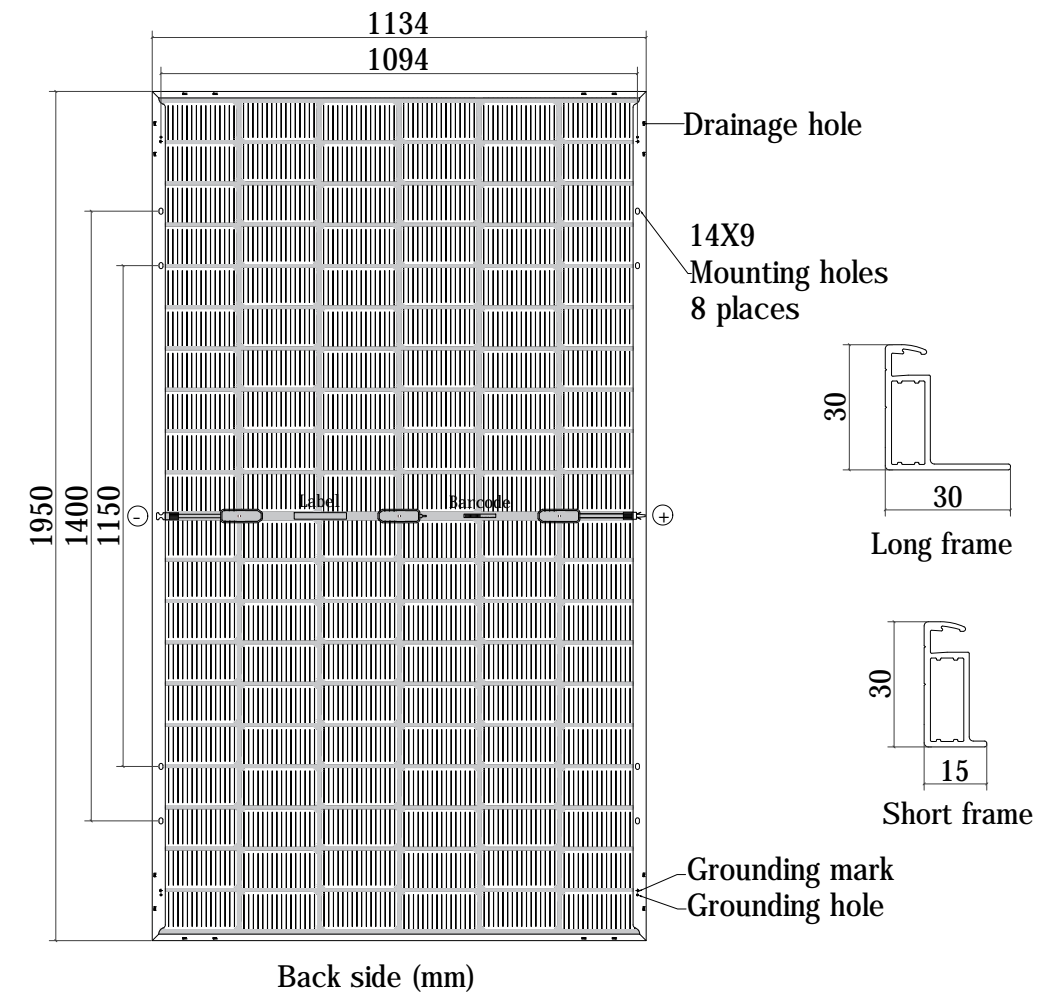

Electrical Specifications¹

Module Type	ÖT I I Í T F E Ü V E Ö I € H B B		Ö T I J E T F E Ü V E Ö I € P B B		Ö T I J Í T F E Ü V E Ö I € P B B		Ö T Í € E T F E Ü V E Ö I € P B B	
	STC ²	NMOT ³	STC	NMOT	STC	NMOT	STC	NMOT
Testing Condition	STC ²	NMOT ³	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	485	H Í Á	490	H J Á	495	H H Á	500	H Í Á
Maximum Power Current (Imp/A)	F H E Í Á	F E E Á	F H E Í Á	F E E Í Á	F H E E Á	F E E Á	F H E Í Á	F E E Í Á
Maximum Power Voltage (Vmp/V)	H E E Á	H H E Í Á	H E E Í Á	H H E E Á	H E E Í Á	H H E E Á	H E E Í Á	H H E E Á
Short-circuit Current (Isc/A)	F H E Í Á	F F E E Á	F H E Í Á	F F E E Á	F H E Í Á	F F E E Á	F H E Í Á	F F E E Á
Open-circuit Voltage (Voc/V)	I H E G Á	I F E E Á	I H E G Á	I F E E Á	I I E E G Á	I F E E Á	I I E E G Á	I F E E Á
Module Efficiency STC (%)	21.9		22.2		22.4		22.6	

¹ Measurements according to IEC 60904-3, Measurement tolerance: ISC: ±4%, VOC: ± 3%, Bifaciality: 80% ± 5%

² STC (Standard Test Condition): Radiation 1000 W/m², Module temperature 25 C , AM = 1.5

³ NMOT: Radiation 800 W/m², Ambient temperature 20 C , AM = 1.5, Wind Speed 1 m/s

BIFACIAL OUTPUT - REAR SIDE POWER GAIN

10 %	Pmax (STC)	534	539	545	550
20 %	Pmax (STC)	582	588	594	600
30 %	Pmax (STC)	631	637	644	650

Certifications and Warranty

Certifications	IEC 61215, IEC 61730 Ammonia Corrosion Test: IEC 62716 Salt Mist Corrosion Test: IEC 61701 PID (IEC TS 62804); LeTID (IEC TS 63342) Dust & Sand (IEC 60068)
WEEE Registration No.	DE 50188598
Product Warranty	25 years
Peak Power Warranty	30 years linear warranty

1.) First year: min. 99 %. 2.) From the 2nd year: Max. 0.4 % degradation annually. 3.) Min. 87.4 % in the 30th year.

Temperature Characteristics


Nominal Module Operating Temperature (NMOT)	42 ± 2°C
Temperature Coefficient of Pmax (%/ °C)	-0.29
Temperature Coefficient of Voc (%/ °C)	-0.25
Temperature Coefficient of Isc (%/ °C)	+0.048

Packaging

Container	40' HQ
Pallet Dimensions(mm)	2000 × 1140 × 1250
Pieces per Pallet	36
Pieces per Container	864

Operating conditions

Operating Temperature (°C)	-40 to +85
Maximum System Voltage(V)	1500 DC (IEC)
Overcurrent protection rating (A)	30
Power Performance Tolerance (%)	0 / +3
Protection class	II
Max. Test Load, Push/Pull (Pa)	Snow 5400 / Wind 2400
Max. Design Load, Push/Pull (Pa)	3600 / 1600

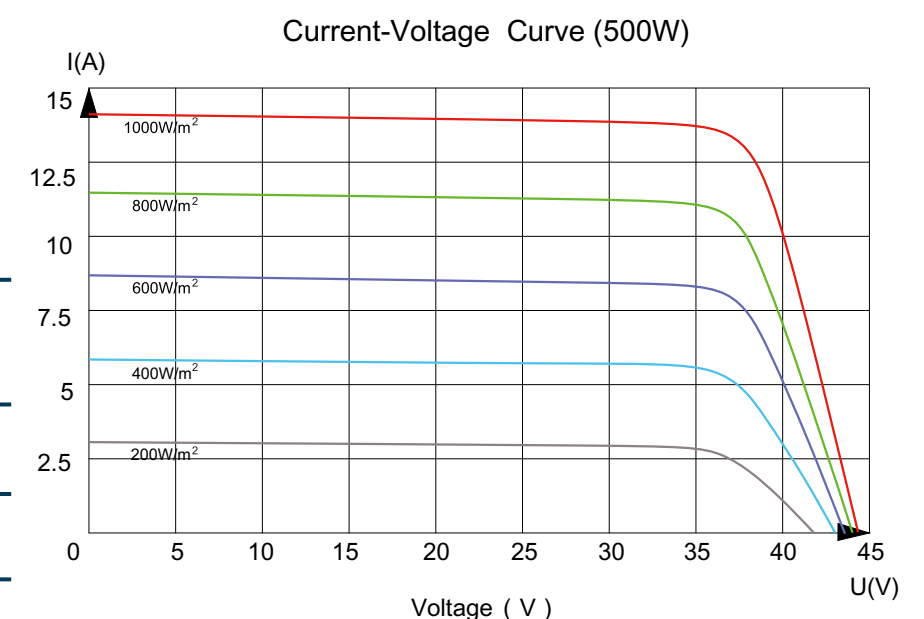

Statement: The installation instructions and the warranty conditions must be followed. Due to technological progress, product parameters will be adjusted accordingly. When signing the contract, the latest data of the company shall prevail.



Hengdian Group DMEGC Magnetics Co.,Ltd.
Hengdian Industrial Zone, Dongyang City Zhejiang Province,
China 322118
Tel: 0086-579-8658-8825 Fax: 0086-579-8655-4845
E-mail: solar@dmegc.com.cn, Website: www.dmegcsolar.com

All information in this data sheet corresponds to EN 50380. Changes and errors excepted.

Status: €F/2021, Document: EN_DS-M10RT-B60HBB-202403_1

Copyright © 2024 Hengdian Group DMEGC Magnetics.
All rights reserved.